

PHILIPPGROUP

PHILIPP Sealing cap (plastic)



VB3-T-023-en - 02/21 - PDF

[Data sheet](#)

PHILIPP Sealing cap (plastic)

The Sealing caps (plastic) are used to close female threads. They can be used for all sizes of the Threaded anchor system regardless of whether a Nailing plate is used or the thread is installed flush to the surface. Therefore, the penetration of dirt is not possible using the Sealing caps. A permanent corrosion protection is only partially given as a penetration of water into the sealed socket cannot be excluded.


 The Sealing cap (plastic) (72KAS_) cannot be combined with Marking rings at all (Picture 4).

Table 1: Dimensions Outside cap

Ref.-No.	Type [RD/M]	ØD [mm]	H [mm]	Weight [kg/100 pcs.]
72ASS12	12	18	10	0,06
Type RD 14 of the threaded transport anchor system is no longer available				
72ASS16	16	25	13	0,14
Type RD 18 of the threaded transport anchor system is no longer available				
72ASS20	20	34	15	0,29
72ASS24	24	35	17	0,38
72ASS30	30	42	19	0,53
72ASS36	36	52	19	0,73
72ASS42	42	60	20	0,96
72ASS52	52	73	22	1,33

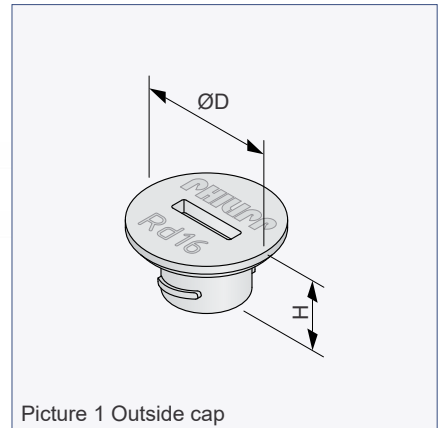


Table 2: Dimensions Sealing cap

Ref.-No.	Type [RD/M]	ØD [mm]	H [mm]	Weight [kg/100 pcs.]
72KAS12	12	16	8	0,07
72KAS14	14	16	9	0,07
72KAS16	16	20	10	0,09
72KAS18	18	22	8	0,11
72KAS20	20	25	11	0,14
72KAS24	24	28	12	0,21
72KAS30	30	36	15	0,40
72KAS36	36	36	15	0,40
72KAS42	42	42	18	0,63
72KAS52	52	56	12	0,69
72KAS56	56	63	21	0,67
72KAS60	60	63	21	0,73

